

# Flotec®



## ComPac

Submersible pumps  
for clear water.  
With integrated  
automatic  
floating switch.



CE





Integrated automatic floating switch.  
Draining level: 3mm with manual mode.

MAN.

AUTO.




Automatic and manual mode.



Ideal for limited space.

The **ComPac Flotec** pumps for clear water are designed to drain domestic water containing particles with a maximum diameter of 5 mm, empty and dry flooded rooms, draw water from wells, basins or cisterns.

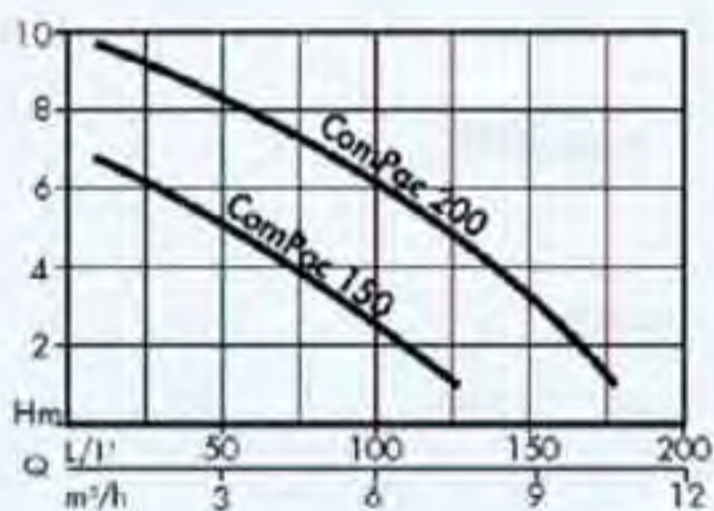

#### Typical features

- Asynchronous single-phase motor with built-in thermal relay.
- Motor shaft with reinforcing ceramic inserts to guarantee a longer life and allow the pump to be used in continuous mode.
- NBR 70 rubber lip.
- Class F motor winding.
- IP 68 Protection Class.
- AISI 416 STAINLESS steel motor shaft.
- Single-impeller hydraulic system in NORYL.
- Colour lithographed package.
- Suitable for clear water with a maximum temperature of 40° C.

#### MODEL

#### ComPac 150z

Absorbed power	300 W
Head / Max. pressure	7 m / 0.7 bar
Max. flow rate	8500 l/h
Pump body	Polypropylene
Minimum draining level	3 mm (manual)
Start / stop levelz	140 mm / 30 mm (manual)
Max. size of impurities	5 mm
Pump outlet	1" 1/4 M
Power cablez	10 m H05 RN-F
Accessories suppliedz	Adjustable connector for hoses ø 19, 25 et 32 mm Check valve